Torcitrice Manuale Portatile per Estremità Filo WPM-NX3612AJ

Model No. WPM-NX3612AJ



SPECIFICATIONS

tensione di lavoro	220V
velocità di torsione	3000 giri/min
capacità filo	fino a 12 mm
peso	2.5 kg
alimentazione	elettrica

Torcitrice manuale, torcitrice semiautomatica, torcitrice manuale, torcitrice elettrica, torcitrice multifilare

Parametri tecnici**:**

tensione di lavoro	Alimentatore	Dimensioni **(mm)•**	Peso **(g)**	Lunghezza del cavo (m)	Lunghezza di collegamento dell'interruttore a pedale **(m)**
CC 24V	Ingresso alimentazione: AC100-240V /50/60Hz, Uscita: DC24V	Lunghezza:248.0 diametro esterno massimo:51.0	535.0	1.2+2.0 (Linea via cavo + linea di prolunga)	2.0
Nel filo del diametro del foro (mm)	Proprietà del filo intrecciato	**Lunghezza dell'anima del filo (mm)**	**Area massima** della sezione trasversale del filo intrecciato **(mm^2)**	Area minima della sezione trasversale di una linea intrecciata **(mm^2)**	Modalità di funzionamento
8/12	Applicare al cavo flessibile multipolare	10-20	4.0	0.3	Pressa a mano/ pressa a pedale

Handheld desktop dual-purpose electric twisting machine

Multi-strands are used in parallel / can be tightened in half a second / high efficiency



Continuous copper wire Tighten the wire	easy to use Twisting is not tired
efficient Twisting	No hidden danger Non-flying copper wire



Portable mobile twisting tool

Φ13mm large-diameter screw thread opening, adapt to the thickness of the wire diameter, the transparent cover can be removed to make the opening wider

Good twisting quality	Lightweight and compact	Flexible operation	Strong applicability

6 PRODUCT FEATURES

Say goodbye to the problems of hand-tightening, tired and slow screwing



01

Suitable for multi-strand parallel operation, twisted wires within 30mm in length

02

Desktop fixed use with foot switch operation is flexible, and the operation of the entrance port is more convenient

03

Hanging and handheld use does not occupy the position of the console

04

Simple assembly line operation

05

New grip artificial mechanics design

06

Replace manual threading to improve efficiency

Handheld desktop dual-purpose electric twisting machine

Twisted wire range: wire length within 30mm
Multi-strand cord ≤30mm²



1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords can be automatically tightened







Hanging hook
Pedal edge wiring
Body
Manual switch
power cable
transparent lid
Twisting port

Sample display

This machine supports 1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords to be twisted together







Product details





Manual switch

Touch the button switch, tighten the thread in half a second, it's so fast

Twisting clamp

You can put multiple copper core wires into the twisting clamp, touch the button switch to complete the twisting

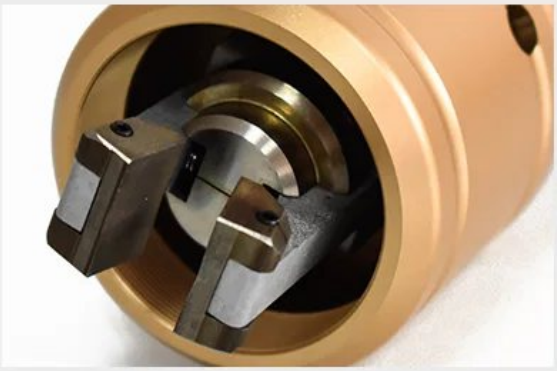

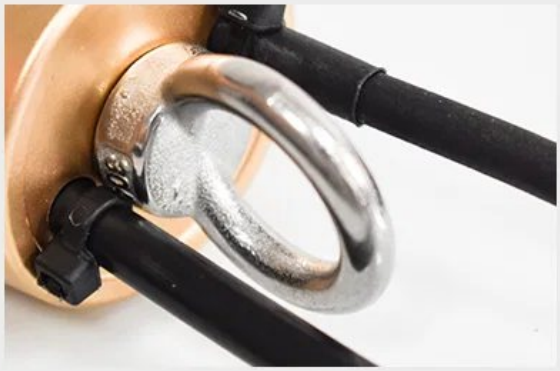

Hanging hook

Hanging and handheld use does not occupy the position of the console

Adjustable voltage

The voltage of the power adapter can be adjusted to a suitable value according to the wire specification, the smaller the wire diameter, and the larger the smaller diameter.





Desktop use

It can be fixed on the desktop, with a foot switch for flexible operation

transparent lid

The twisting machine port has a transparent cover that can be removed, and the transparent cover is larger.



Parts List



FAQ

Quale ingresso di alimentazione accetta la macchina semiautomatica portatile per torsione dei fili WPM-NX3612AJ?

L'ingresso di alimentazione è AC100-240V a 50/60Hz, con un'uscita di DC24V. L'ampia gamma AC significa che la macchina può essere utilizzata in regioni con tensioni di rete diverse senza un trasformatore separato.

Quali sono le dimensioni fisiche della macchina portatile per torsione dei fili WPM-NX3612AJ?

La macchina ha una lunghezza di 248.0 e un diametro esterno massimo di 51.0. Il formato portatile compatto è destinato al lavoro di torsione eseguito direttamente sul cablaggio invece che su una postazione fissa da banco.

La macchina semiautomatica portatile per torsione dei fili WPM-NX3612AJ può funzionare con tensioni di rete diverse?

Sì. Accetta AC100-240V a 50/60Hz e converte questa in un'uscita DC24V. Questa gamma di ingresso universale è adatta alla torsione semiautomatica dei fili in officine che operano con tensione di rete bassa o alta.